

Depth Filtration BECO PROTECT® FS

Depth Filter Cartridges

BECO PROTECT FS FineStream depth filter cartridges are innovative depth filter cartridges with a unique design that increases the filter area.

The variable flow of the BECO PROTECT FS depth filter cartridge is also unique. This can be adjusted to flow from outside to inside or, if the inlet and outlet ends on the housing are reversed, from inside to outside. The filtering effect remains the same.

The BECO PROTECT FS depth filter cartridge is used in the beverage industry.

Features and Benefits

- High retention for a reliable separation effect, β ratio ≥ 5000 or $\geq 99.98\%$ efficiency for defined particles
- Outstanding protection for subsequent membrane filtration thanks to the fine, newly developed filter material (by $0.2 \mu\text{m}$ –Type) and thus an increased membrane filter cartridge service life
- The larger filter area gives a greater filter performance
- Variable flow
- Minimum product loss with flow from inside to outside
- Backwashable at up to 29 psig (200 kPa, 2 bar) at 176 °F (80 °C)
- High chemical resistance by using 100% polypropylene

Configuration

BECO PROTECT FS depth filter cartridges are made from high-quality, special pleated polypropylene layers. The filter material has a broad chemical compatibility. The cage and core of polypropylene ensures maximum mechanical stability. All materials used ensure product-neutral filtration without adsorption or particle migration.



Materials

| | |
|-------------------------|--|
| Filter material: | Polypropylene |
| Cage, Core | Polypropylene |
| End cap/adaptor: | Polypropylene, adapter with reinforcing ring |
| O-rings: | Silicone (standard) |

The plastic components meet the requirements of Directive 10/2011/EC and amendments. All materials used meet the FDA requirements according to 21 CFR § 177.1520.


Technical Data

| Nominal length for Code F | |
|---------------------------|-----------|
| 1 = 10" | (254 mm) |
| 2 = 20" | (508 mm) |
| 3 = 30" | (762 mm) |
| 4 = 40" | (1016 mm) |

| | |
|---|---|
| Diameter: | 2.75 in (70 mm) |
| Maximum operating temperature: | 176 °F (80 °C) |
| Maximum differential pressure in flow direction: | 69 psid (480 kPa, 4.8 bar) at 77 °F (25 °C) 29 psid (200 kPa, 2 bar) at 176 °F (80 °C) |
| Steam sterilization: | Max. 14.5 psig (100 kPa, 1 bar) at 250 °F (121 °C) for 30 minutes |
| Hot water sanitization: | Max. 194 °F (90 °C) for 30 minutes |
| Chemical sterilization: | Can be sterilized with conventional chemical cleaners |

Flow Rate

10" with water at 68 °F (20 °C)(standard values)

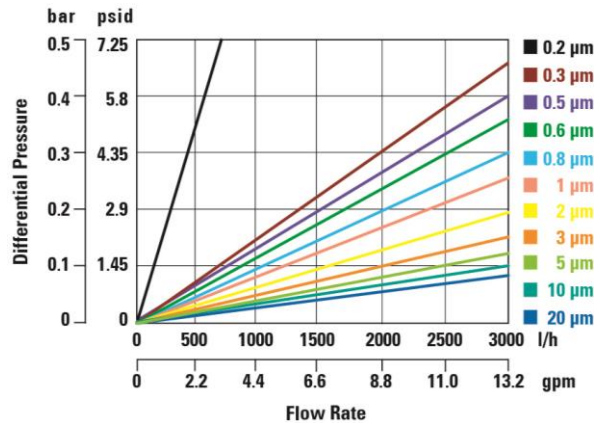

Filter Cartridges Types/Retention Ratings

| Type | Retention rating (µm) | Type | Retention rating (µm) |
|-------|-----------------------|-------|-----------------------|
| FS002 | 0.2 | FS020 | 2.0 |
| FS003 | 0.3 | FS030 | 3.0 |
| FS005 | 0.5 | FS050 | 5.0 |
| FS006 | 0.6 | FS100 | 10.0 |
| FS008 | 0.8 | FS200 | 20.0 |
| FS010 | 1.0 | | |

Adapter Codes

| Code 2 | Code 7 |
|---|---|
| Single open end (SOE) 2-222 O-ring triple bayonet adapter with spear | Single open end (SOE) 2-226 O-ring double bayonet adapter with spear |



Code F

Double open end (DOE)
with two flat gaskets



Ordering Information

BECO PROTECT FS depth filter cartridges with protective foil in carton.

| Type | Retention rating | Adapter | Nominal length | Gasket |
|------|------------------|------------------|-------------------|--------------|
| FS | 002 = 0.2 µm | 2 = Code 2 (SOE) | 1 = 10" (250 mm) | S = Silicone |
| | 003 = 0.3 µm | 7 = Code 7 (SOE) | 2 = 20" (500 mm) | E = EPDM* |
| | 005 = 0.5 µm | F = Code F (DOE) | 3 = 30" (750 mm) | |
| | 006 = 0.6 µm | | 4 = 40" (1000 mm) | |
| | 008 = 0.8 µm | | | |
| | 010 = 1.0 µm | | | |
| | 020 = 2.0 µm | | | |
| | 030 = 3.0 µm | | | |
| | 050 = 5.0 µm | | | |
| | 100 = 10.0 µm | | | |
| | 200 = 20.0 µm | | | |

* Code F only available with EPDM gaskets

Example

| | | | | |
|----|-----|---|---|---|
| FS | 002 | 7 | 2 | S |
|----|-----|---|---|---|

BECO PROTECT FS depth filter cartridges; 0.2 µm retention rating; Code 7, 20" (500 mm); silicone gasket

Regeneration

Rinse BECO PROTECT FS depth filter cartridges after each use in the direction of flow using approximately 1 µm of filtered, softened water under counter pressure. This will primarily remove any deposited, water-soluble haze substances such as polysaccharides (glucanes), proteins, tannins, tartaric acid crystals. Rinsing with hot water (176 °F/80 °C) will typically remove persistent residues, if used in a timely manner. The hot water may remain in the filter overnight.

Note: Detailed information on regeneration and chemical cleaning can be found in Application Note 1 A 4.3.1.1 and 1 A 4.7.

Safety

When used as directed and handled correctly, there are no known unfavorable effects associated with this product. BECO PROTECT FS depth filter cartridges do not require the provision of safety-relevant information.

Storage, handling and transport do not present any environmental and health risks.

Disposal

BECO PROTECT FS depth filter cartridges should be treated as industrial waste. Any local and other official regulations in relation to the filtered product must be followed.

Storage

Store cartridges in their original packaging and in a dry, odor-free and UV ray protected place.

Use filter cartridges within 60 months after production date.

Certified Quality

During the production process, BECO PROTECT FS depth filter cartridges are regularly monitored to ensure consistent excellent quality control.

North America
44 Apple Street
Tinton Falls, NJ 07724
Toll Free: 800 656-3344
(North America only)
Tel: +1 732 212-4700

Europe/Africa/Middle East
Auf der Heide 2
53947 Nettersheim, Germany
Tel: +49 2486 809-0

Friedensstraße 41
68804 Altlußheim, Germany
Tel: +49 6205 2094-0

An den Nahewiesen 24
55450 Langenlonsheim, Germany
Tel: +49 6704 204-0

China
No. 3, Lane 280,
Linhong Road
Changning District, 200335
Shanghai, P.R. China
Tel: +86 21 5200-0099

Singapore
4 Loyang Lane #04-01/02
Singapore 508914
Tel: +65 6825-1668

Brazil
Rua Clark, 2061 - Macuco
13279-400 - Valinhos, Brazil
Tel: +55 11 3616-8400

**For more information, please
email us at filtration@eaton.com
or visit www.eaton.com/filtration**

EN
1 A 4.3.12
12-2016

© 2016 Eaton. All rights reserved. All trademarks and registered trademarks are the property of their respective owners. All information and recommendations appearing in this brochure concerning the use of products described herein are based on tests believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Eaton as to the effects of such use or the results to be obtained. Eaton assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete, since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations.